

High temperature magnets



These closures have been specially designed for use at high temperatures. The quality of the high-temperature magnets and the metal construction of the parts mean that they can be used in environments of up to 250°C, such as boilers, ovens, furnaces, etc.

Adjustable on sheet metal

These closures have been specially designed for use at high temperatures. The quality of the high-temperature magnets and the metal construction of the parts mean that they can be used in environments of up to 250°C, such as boilers, ovens, furnaces, etc.



Model	Reference	Dimensions (mm)	Typical load-bearing capacity (kg)	Quantity per smallest packaging
C 12-8 ch	0543001	Diam 16,5 x 26	4,2	20
C 16-8 ch	0546001	Diam 21,5 x 32	8	20

Catches

This model consists of a hinged, spring-loaded magnetic block and a rigid connecting bar. The angled fixing of this latch is ideal for horizontal and vertical rebate applications.




Model	Reference	Dimensions (mm)	Typical load-bearing capacity (kg)	With counterplate	Quantity per smallest packaging
Catch heat	0121007	45 x 12 x 15,5	5	Yes 	10


HIGH TEMPERATURE MAGNETS



Adjustable on sheet metal

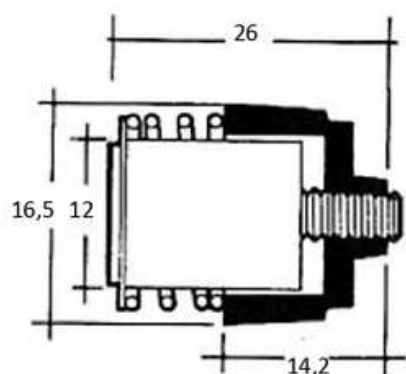



C 12-8 ch

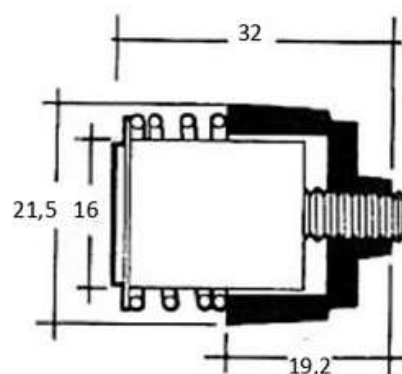

C 16-8 ch



Heat catch

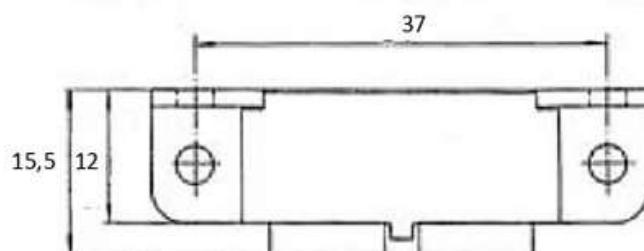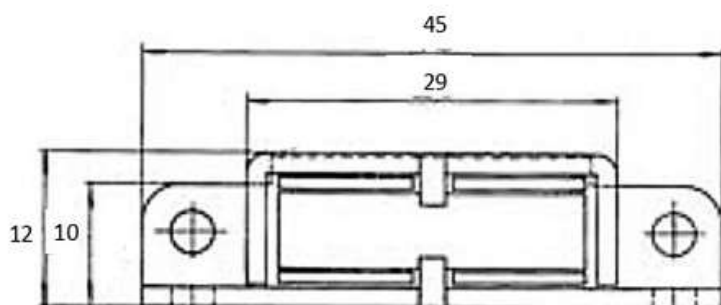

Heat catch counterplate

